



5" Ceramic Woofer


Program Power 100 W Rated impedance 4 Ohm 5"- 130 mm Nominal diameter Sensitivity (1W/1m) 88 dB

Voice coil diameter 1 in - 25 mm Frequency Range 55-8000 Hz

SPECIFICATIONS


Nominal Diameter	5''- 130 mm
Rated Impedance	4 Ohm
Nominal Power Handling ¹	50 W
Program Power ²	100 W
Sensitivity ³	88 dB
Frequency Range ⁴	55-8000 Hz
Minimum Impedance	-
Basket Material	Steel
Magnet Material	Ferrite
Cone Material	-
Cone Shape	-
Surround	Rubber
Suspension	-
Voice Coil Diameter	1 in - 25 mm
Voice Coil Winding Material	-
Voice Coil Length	6,2 mm - 0,24 in
Voice Coil Former Material	Aluminum
Connection type	-
Ferrofluid	No
Magnetic Gap Height	4 mm - 0,16 in
Max. Peak to Peak Excursion	-
Efficiency Bandwidth Product EBP	65
Recommended Loading	Car door panel
Volume / Tuning frequency	-
Maximum recommended frequency	-

FREQUENCY RESPONSE AND IMPEDANCE CURVE 67

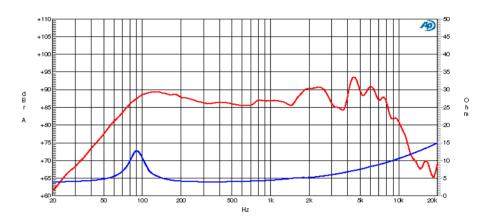



Resonance frequency	Fs	75 Hz
DC Resistance	Re	3,5 Ohm
Mechanical Q Factor	Qms	2,68
Electrical Q Factor	Qes	1,15
Total Q Factor	Qts	0,81
BI Factor	BI	3,03 Tm
Effective Moving Mass	Mms	6,42 g
Equivalent Cas air loaded	Vas	6,5 lt (dm³) - 0,23 cuft
Suspension Compliance	Cms	0,7 mm/N
Effective Piston Diameter	D	102 mm - 4,02 in
Effective piston area	Sd	82 cm ² - 12,71 sq in
Max. Linear Excursion ⁵	Xmax	2,1 mm - 0,08 in
Voice Coil Inductance @ 1kHz	Le	-
Half-space Efficency	ე0	-



MOUNTING AND SHIPPING INFORMATION

Overall Diameter	129,5 mm - 5,1 in
Baffle Cutout Diameter	112 mm - 4,41 in
Flange and Gasket Thickness	8 mm - 0,31 in
Total Depth	55 mm - 2,17 in
Bolt Circle Diameter	140 mm - 5,51 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	0,49 Kg - 1,08 lb
Shipping Units	6 Pcs

NOTES

- ¹ Nominal power is determined according to AES2-1984 (r2003) standard.
- ² Program Power is defined as 3 dB greater than the Nominal rating.
- Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
 Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
 Frequency response curve is measured on infinite baffle conditions.