



## SP-150

Order No.: 0100320

Price upon request

### PRODUCTINFOS

Hi-fi bass midrange speaker, 30 W, 8  $\Omega$

- White polypropylene cone
- Basket with plastic trim ring

### TECHNICAL SPECIFICATIONS


#### SP-150

Impedance (Z)	8 $\Omega$
Frequency range	f3-4,000 Hz
Resonant frequency (fs)	35 Hz
Power rating (RMS)	30 W
Peak music power output (MAX)	60 W
Sensitivity	90 dB/W/m
Suspension compl. (Cms)	1.56 mm/N

**SP-150**

Moving mass (Mms)	10.4 g
Mech. Q factor (Qms)	2.83
Electr. Q factor (Qes)	0.61
Total Q factor (Qts)	0.5
Equivalent volume (Vas)	35 l
DC resistance (Re)	6.5 $\Omega$
Force factor (BxL)	7.50 Tm
Voice coil induct. (Le)	0.45 mH
Voice coil diameter	$\varnothing$ 25.5 mm
Voice coil former	aluminium
Linear excursion ( $X_{MAX}$ )	$\pm$ 2.5 mm
Eff. cone area (Sd)	127 cm <sup>2</sup>
Magnet weight	380 g
Magnet diameter	$\varnothing$ 100 mm
Mounting cutout	$\varnothing$ 145 mm
Mounting depth	65 mm
Mounting hole diameter	$\varnothing$ 156 mm
Hole spacing X-axis	110 mm
Hole spacing Y-axis	110 mm
Dimensions	$\varnothing$ 170 mm x 75 mm
Outside diameter	$\varnothing$ 170 mm
Width	$\varnothing$ 170 mm
Depth	75 mm
Admiss. ambient temp.	0-40 °C
Weight	1.215 kg
Packing unit	1
Type of speaker	6"

SP-150 (10.0320)

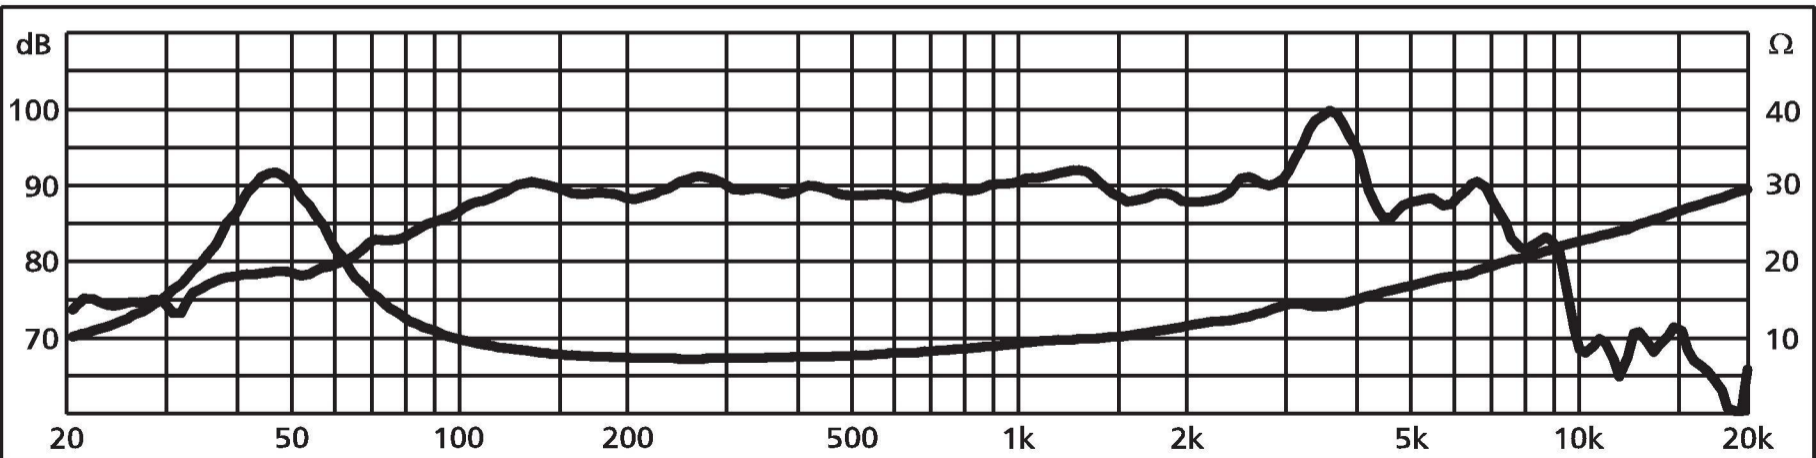

**SP-150**

