



# 165 GMF Bass medium driver unit – 35W / 96dB / 8Ω

## SPECIFICATIONS

**Efficiency:** 96dB  
**Frequency response:** 60Hz-10KHz  
**Impedance :** 8Ω  
**Power max. RMS :** 35W


**Suspension :** 5 paper pleats  
**Linear excursion:** 6mm  
**Magnet diameter:** 96mm  
**Magnetic field:** 1.4 T  
**Diameter HP :** 185mm  
**Frame thickness:** Alu 10mm  
**Diameter fixation:** 175mm  
**Diameter drilling holes:** 160mm  
**Depth HP :** 85mm

**Fs :** 64Hz  
**Re :** 5.5Ω  
**Qts :** 0.39  
**Qe :** 0.42  
**Qm :** 6.2  
**Vas :** 40 L  
**Bl :** 5.6  
**Cms :** 1  
**Mms :** 5.5 g  
**Sd :** 165 cm<sup>2</sup>


**EAN Code:** 0660042796677

**Dimensions & Weight PRODUCT**  
Ø 185 x H 85 mm  
1,9 Kg


**Dimensions (LxHxP) & Weight PACKAGING**  
215 x 200 x 95 mm  
2,1 Kg

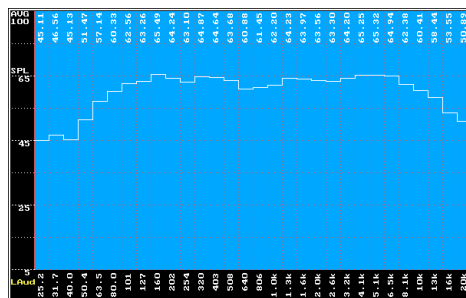


Frequency response in 1/3 octave

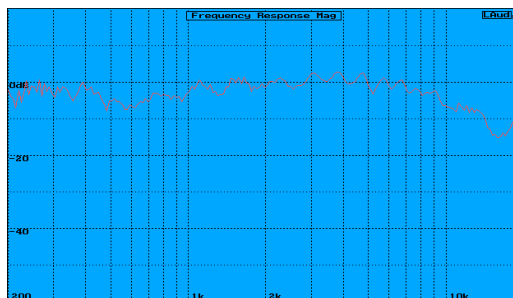

Frequency response 200 Hz to 20 kHz in the axis

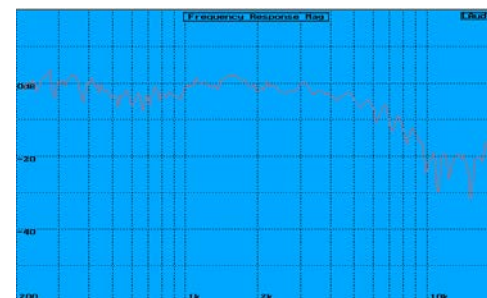

Frequency response 200 Hz to 20 kHz at 30°

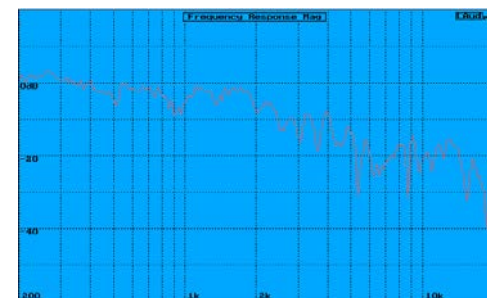

Frequency response 200 Hz to 20 kHz at 60°

The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction. Loudspeakers SUPRAVOX are divided into 3 ranges, the series Classic (ferrite), the series 2000 (Alnico) and the series EXC (electro magnet) ..

Each loudspeakers is measured one by one, provided with its sheet of Thiele and Small parameters. According to those, they are matched to give you 2 loudspeakers works absolutely in the same way.

### Classic series

Its objective, to maintain the philosophy of SUPRAVOX ,full range driver units and high efficiency. We work still to widen the useful bandwidth for a highest efficiency possible, while unceasingly improving the definition, the quality and the linearity. Diameter 135 to 380 mm, the audiophile can satisfy its passion.

This driver unit takes the characteristics of the 165LB, the suppression of the dome makes it possible to release the serious register, the warhead allowing a better spacialisation of the medium. It is supplemented ideally with the TW 2-20.

