


- CORRUGATED, THICK ALUMINUM CONE BODY, VERY STRONG STRUCTURE OF SUSPENSION SYSTEM
- SPECIAL DESIGN FOR HIGH PERFORMANCE, LONG THROW, HIGH POWER HANDLING (350W RMS), HIGH DURABILITY PURPOSE
- 38mm OF VC WITH CCAW

8" HIGH POWER SUBWOOFER

DIAPHRAGM MTL	Aluminium
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1M	84 dB
FREQUENCY RESPONSE	30Hz-1K Hz
FREEAIR RESONANCE	30 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	25 mm
NOMINAL POWER	350 W
MUSIC POWER	700 W
FORCE FACTOR, BL	9.77 TM
MAGNET WEIGHT (38.1 oz)	1078g
MOVING MASS	69.85 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	366.877 μ MN ⁻¹
EFFECTIVE PISTON AREA	0.022 m ²
Levc	0.386 mH
Zo	25 ohm
Xmax	8 mm
Vas	25.22 Litr
Qts	0.43
Qms	3.02
Qes	0.50

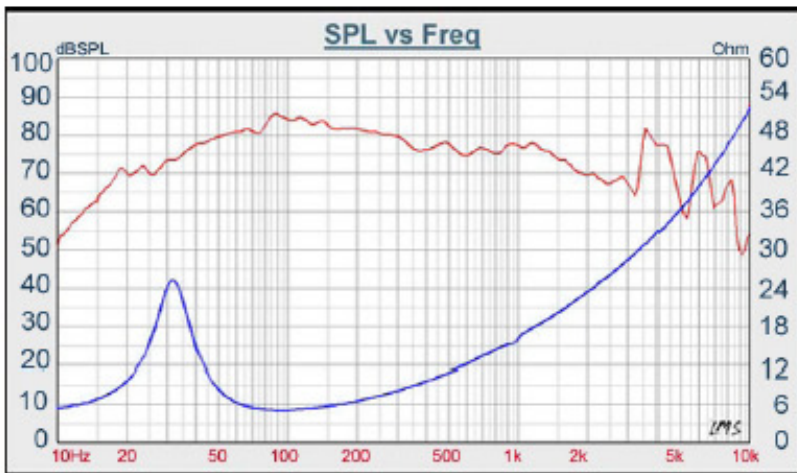

TB SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com