




10" Ceramic Woofer

Program Power	600 W
Rated impedance	4 Ohm
Nominal diameter	10"- 250 mm
Sensitivity (1W/1m)	96,5 dB
Voice coil diameter	2,5 in - 64 mm
Frequency Range	80-3500 Hz

SPECIFICATIONS

Nominal Diameter	10"- 250 mm
Rated Impedance	4 Ohm
Nominal Power Handling ¹	300 W
Program Power ²	600 W
Sensitivity ³	96,5 dB
Frequency Range ⁴	80-3500 Hz
Minimum Impedance	-
Gasket Material	Aluminum
Magnet Material	Ferrite
Cone Material	Doped cellulose fiber
Cone Shape	-
Surround	Nomex Fabric
Suspension	Nomex Fabric
Voice Coil Diameter	2,5 in - 64 mm
Voice Coil Winding Material	Copper
Voice Coil Length	16 mm - 6,3 in
Voice Coil Former Material	Glass fiber
Connection type	Faston
Ferrofluid	No
Magnetic Gap Height	8 mm - 0,31 in
Max. Peak to Peak Excursion Xvar	-
Efficiency Bandwidth Product EBP	211
Recommended Loading	Vented Box
Volume / Tuning frequency	8 Lt (dm ³) - 0,283 cuft / 97 Hz
Maximum recommended frequency	-


FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

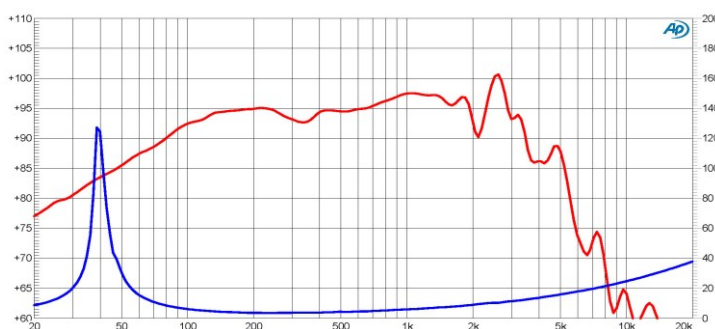

T/S PARAMETERS

4 Ohm

Resonance frequency	Fs	40 Hz
DC Resistance	Re	2,54 Ohm
Mechanical Q Factor	Qms	14,24
Electrical Q Factor	Qes	0,19
Total Q Factor	Qts	0,19
BI Factor	BI	11,97 Tm
Effective Moving Mass	Mms	42,56 g
Equivalent Cas air loaded	Vas	66,3 lt (dm ³) - 2,341 cuft
Suspension Compliance	Cms	0,37 mm/N
Effective Piston Diameter	D	213 mm - 8,386 in
Effective piston area	Sd	356 cm ² - 55,18 sq.in
Max. Linear Excursion ⁵	Xmax	6 mm - 0,24 in
Voice Coil Inductance @ 1kHz	Le	0,479 mH
Half-space Efficiency	η0	2,16 %



MOUNTING AND SHIPPING INFORMATION

Overall Diameter	268 mm - 10,55 in
Baffle Cutout Diameter	235 mm - 9,25 in
Flange and Gasket Thickness	13,5 mm - 0,53 in
Total Depth	116,5 mm - 4,587 in
Bolt Circle Diameter	253 mm - 9,96 in
Bolt Holes Quantity and Diameter	8 / 5 mm - 0,2 in
Net Weight	0,75 Kg - 1,65 lb
Shipping Units	2 Pcs

NOTES

- ¹ Nominal power is determined according to AES2-1984 (r2003) standard.
- ² Program Power is defined as 3 dB greater than the Nominal rating.
- ³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- ⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- ⁵ Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- ⁶ Frequency response curve is measured on infinite baffle conditions.
- ⁷ Impedance curve is measured in free air conditions at small signals.